




FIRE DOG™

SAFER REELS

SERIES FD-15 To handle ½" I.D. hose

FEATURES

- Materials - Powder coated aluminium | Galvanised steel
- Crank rewind standard
- Optional direct drive electric, air or hydraulic
- Brake / Drag options refer page 4
- ½" NPTF 90° inlet swivel joint
- ½" NPTF riser outlet hub
- Pressures to 344 bar / 5000 psi
- Temperatures from -51°C to +121°C
- Refer to 'Optional Extras (Page 6-7)' for all reel accessories
- Custom reel sizes available on request

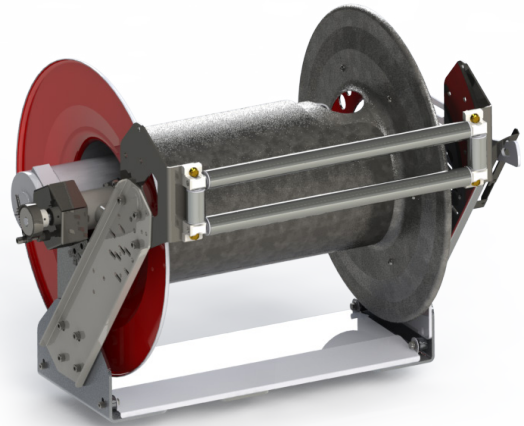

*Shown with standard hose roller guide
FlatWinder™ available on all reels.

Model Number	Hose Capacity of Reel (m)		Reel Dimensions*** (mm)												
			A	B	C	D	E	E RT Roller FlatWinder	F	G	H	X1	Y1	X2	Y2
	I.D. (in)	1/2 13													
	O.D. (in)	7/8 22													
FD15-220-475		32	313	197	293	300	560	672	536	535	290	213	250	190	200
FD15-290-475		44	377	271	293	300	560	672	543	535	290	271	250	238	200
FD15-355-475		55	437	339	293	300	560	672	544	535	290	331	250	301	200
FD15-425-475		66	512	407	293	300	560	672	762	535	290	406	250	376	200
FD15-220-575		59	313	216	293	300	651	763	536	643	350	213	250	190	200
FD15-270-575		69	362	253	293	300	651	763	640	643	350	261	250	231	200
FD15-290-575		79	377	290	293	300	651	763	543	643	350	271	250	238	200
FD15-355-575		98	437	358	293	300	651	763	544	643	350	331	250	301	200
FD15-425-575		116	512	426	293	300	651	763	762	643	350	406	250	376	200
FD15-220-650		87	313	216	293	300	685	797	536	683	370	231	250	190	200
FD15-270-650		102	362	253z	293	300	685	797	640	683	370	261	250	231	200
FD15-290-650		117	377	290	293	300	685	797	543	683	370	271	250	238	200

NOTES:

- Specifications subject to change without notice.
- A flexible connector must be used between the inlet pipe and swivel joint.
- Manual, electric 12v / 24v DC, hydraulic and air rewind models available.
- Contact factory for sizes not listed above.
- ***X, Y indicates mounting holes.
- Consult factory for weight

