


FIRE DOG™ PRODUCT RANGE

SAFER DIRECT DRIVE REEL SYSTEM

SERIES FD-25 To handle ¾" I.D. or 1" I.D. booster hose

FEATURES

- Materials - Powder coated aluminium | Galvanised steel
- Crank rewind standard
- Optional direct drive electric, air or hydraulic
- Brake / Drag options refer page 4
- 1" NPTF 90° inlet swivel joint
- 1" MNST riser outlet hub
- Pressures to 207 bar / 3000 psi
- Temperatures from -51°C to +121°C
- Refer to 'Optional Extras (Page 6-7)' for all reel accessories
- Custom reel sizes available on request

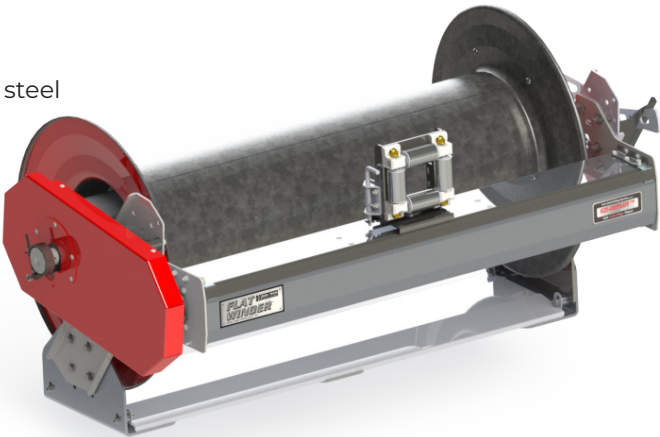

*Shown with FlatWinder™ hose guide
FlatWinder™ available on all reels.

Model Number	Hose Capacity of Reel (m)			Reel Dimensions*** (mm)												
	I.D. (in)	3/4	1	A	B	C	D	E	E	F	G	H	X1	Y1	X2	Y2
	I.D. (mm)	19	25													
	O.D. (in)	1-9/32	1-9/16													
	O.D. (mm)	33	40													
FD25-425-475		21	18	512	407	293	300	560	672	762	535	290	406	250	376	200
FD25-600-475		31	27	713	581	308	300	560	672	937	535	290	595	250	577	200
FD25-900-475		47	40	1013	881	308	300	560	672	1237	535	290	895	250	877	200
FD25-425-575		52	31	512	426	293	300	651	763	762	643	350	406	250	376	200
FD25-600-575		75	45	713	600	308	300	651	763	937	643	350	595	250	577	200
FD25-900-575		113	68	1013	900	308	300	651	763	1237	643	350	895	250	877	200
FD25-1000-575		126	76	1113	1002	308	300	651	763	1349	643	350	1007	250	977	200
FD25-425-650		70	46	512	426	293	300	685	797	762	683	370	406	250	376	200
FD25-600-650		101	66	713	600	308	300	685	797	937	683	370	595	250	577	200
FD25-900-650		152	99	1013	900	308	300	685	797	1237	683	370	895	250	877	200
FD25-425-730		90	62	512	426	293	300	686	798	762	687	373	406	250	376	200
FD25-600-730		126	87	713	600	308	300	686	798	937	687	373	595	250	577	200
FD25-900-730		189	131	1013	900	308	300	686	798	1237	687	373	895	250	877	200

NOTES:

- Specifications subject to change without notice.
- A flexible connector must be used between the inlet pipe and swivel joint.
- Manual, electric 12v / 24v DC, hydraulic and air rewind models available.
- Contact factory for sizes not listed above.
- ***X, Y indicates mounting holes.
- Consult factory for weight

