

Dual
Hose

Series 600

• Hydraulics • Spray Painting • Air/Water

To handle dual 1/4" through 3/4" I.D. hose.

- Rollformed channel frame for heavy-duty applications.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlets: 90° balanced pressure swivel joints, 1/2" female NPT threads (1" inlet available).
- Standard outlets: 1/2" female NPT threads (3/4" outlet available).
- Standard pressures to 3000 psi (207 bar), available up to 10,000 psi (690 bar) – must specify.
- Temperatures from -60°F to +250°F (-51°C to +121°C), optional temps to +400°F (+204°C) – must specify.
- 4-way roller assembly.
- Constant tension is available – consult factory.
- Reels for use with oxygen/acetylene. See Series N400 on page 8.



Standard configuration shown

PARTS DRAWING – ISO 8

Model Number	Hose Capacity of Reel feet m					Approx. Weight lb. kg		Standard Roller Assy.	Reel Dimensions*** in. mm									
	I.D. in. mm	1/4 6	3/8 10	1/2 13	3/4 19	NET	SHIP		A	B	C	D	E	F	G	H	X	Y
	O.D. in. mm	5/8 16	3/4 19	7/8 22	1-9/32 33				A	B	C	D	E	F	G	H	X	Y
615-23-24-10.5B	2/65	2/60	2/30	–		53	88	R203	8.25	3	10.5	23.25	24.38	13	23.88	12.5	3.5	20
	2/20	2/18	2/9	–		24	40		210	76	267	591	619	330	607	318	89	508
617-25-26-15.5B	2/75	2/75	2/50	–		93	128	R205	10.25	5	15.5	25	26.12	15	25.88	13	5.5	21.75
	2/23	2/23	2/15	–		42	58		260	127	394	635	663	381	657	343	140	552
617-25-26-15.5A	2/100	2/85	–	–		120	155	R205	10.25	5	15.5	25	26.12	15.75	25.88	13.5	5.5	21.75
	2/31	2/26	–			54	70		260	127	394	635	663	400	657	343	140	552
† 618-30-31-15.5A	–	–	2/100	2/50		130	165	R206	11.25	6	15.5	28.5	29.62	16.75	31.88	17	6.5	25.25
	–	–	2/31	2/15		59	75		286	152	394	724	752	425	797	432	165	641

Notes:

A hose stop is necessary to keep spring from unwinding.


- Specifications subject to change.
- Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
- Other sizes, from standard components, available on request.
- Finish:** Refer to page 3.
- Be sure to check dimensions and weights prior to ordering.**

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

***X, Y indicate mounting holes. See page 5.

† Must specify if 1" joints and 3/4" outlet risers are required.

For hydraulic tool circuit applications, full flow swivels with Viton seals are recommended (add 2.25 to "F" dimension in chart).

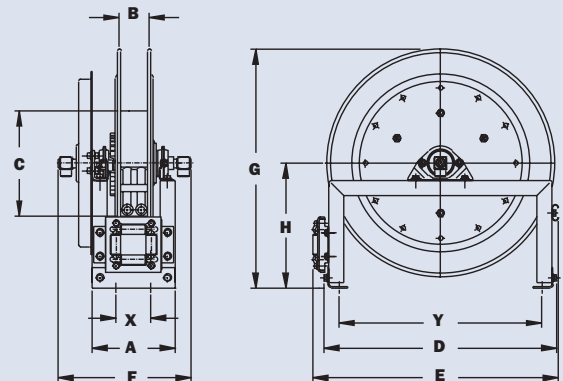

Available Roller Positions



SR (STD)



VR (OPT)



TR (OPT)



TR (Wallmount)