

Series 7500

- Fuel Dispensing (Consult Factory) • Bulk Transfer
- Suction/Discharge (Consult Factory)

To handle single 1" through 1-1/2" I.D. hose.

- Choose gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Crank rewind reels supplied with pinion brake and power rewind reels with a strap brake.
- Standard inlet: 90° ball bearing swivel joint, 1-1/2" female NPT threads, and 2" victaulic groove.
- Standard outlet: flanged riser, 1-1/2" female NPT threads.
- Standard inlet, outlet riser, and hub assembly are steel. Optional bronze or aluminum swivel joint and stainless steel hub assembly and riser are available.
- Rollers may be purchased as accessory items.
- Standard pressures to 600 psi (41 bar), available up to 1000 psi (69 bar) – must specify.
- Temperatures from -25°F to +250°F (-32°C to +121°C), optional temps to +400°F (+204°C) – must specify.



Optional left top configuration shown



Optional Auxiliary Rewind

Ring and pinion shaft rewind unit with removable crank handle.

PARTS DRAWING – ISO 18

Model Number For power rewind see Note 5	Hose Capacity of Reel feet m				Approx. Weight Crank Rewind ₄ lb. kg see Note 4		Reel Dimensions*** in. mm									
	I.D. in. mm	1 25	1-1/4 32	1-1/2 38	NET	SHIP	A	B	D	E	F CRANK	F POWER	G	H	X	Y
	O.D. in. mm	1-9/16 40	1-13/16 46	2-1/16 52												
7528-19-21		85	70	50	104	146	25.5	20	20.5	18.75	32	33	21.5	12.12	17.5	16.75
		26	21	15	47	66	648	508	521	476	813	838	546	308	445	425
7538-23-24		200	190	100	130	172	35	29.5	20.5	22.75	41.5	42.5	23.5	12.12	27	16.75
		61	58	30	59	78	889	749	521	578	1054	1080	597	308	686	425
7520-25-26		115	75	50	106	148	17	11.5	25.5	24.75	23.5	24.5	27.88	15.5	9	21.75
		35	23	15	48	67	432	292	648	629	597	622	708	394	229	552
7528-25-26		200	135	100	123	165	25.5	20	25.5	24.75	32	33	27.88	15.5	17.5	21.75
		61	41	30	56	75	648	508	648	629	813	838	708	394	445	552
7522-30-31		190	160	100	118	168	19	13.5	25.5	28.75	25.5	26.5	29.88	15.5	11	21.75
		58	49	30	54	76	483	343	648	730	648	673	759	394	279	552
† 7528-30-31		285	260	160	131	181	25.5	20	25.5	28.75	32	33	29.88	15.5	17.5	21.75
		87	79	49	59	82	648	508	648	730	813	838	759	394	445	552
† 7526-33-34		335	200	200	133	183	22.5	17.5	31.5	31.75	29.25	30.25	33.62	17.75	15	27.75
		102	61	61	60	83	572	445	800	806	743	768	854	451	381	705

Notes:


- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Dimensions shown for reels up to and including 30-31 disc size reflect pressed frames. All others are rollformed channel frames.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models.

	Net lbs/kg	Ship lbs/kg
Electric	40/18.1	40/18.1
Hydraulic	20/9.1	20/9.1
Air	20/9.1	20/9.1

- When ordering power rewind models, prefix model number with:
A = Air Rewind
EP = Electric Rewind (1/2 HP)
HD = Hydraulic Rewind
(Air rewind reels are supplied with control valve and 18" air hose; 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately; hydraulic rewind reels are not supplied with control valve.)
- Finish:** Refer to page 3.
- Be sure to check dimensions and weights prior to ordering.**

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

*** X, Y indicate mounting holes. See page 5.
†Some applications require a clutch/reduction unit.

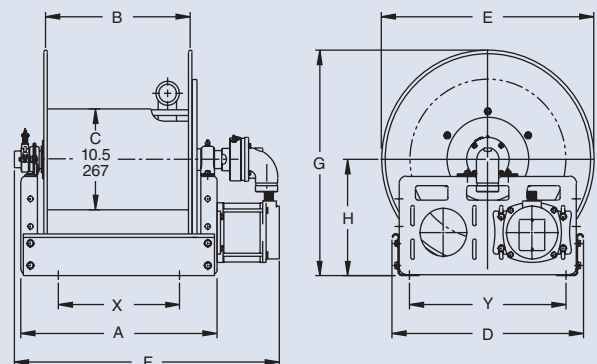

Power rewind shown