

Series AV

For fast rollout and storage.

- Broadcast and pro-audio applications. The reels are stackable and have side-mounted connector panels.
- Rugged steel and aluminum construction throughout. Square tubing frame.
- Black, non-reflective matte finish.
- Equipped with one durable rubber twist tie for cable ends.
- Removable side panel (blank panel is supplied as standard).
- Standard strain relief inside panel compartment.
- Frame clips allow stacking.
- Optional heavy-duty, locking caster wheels (set includes 2 locking and 2 non-locking casters).
- Optional pull handle is available for AV-2 and AV-3 (Part No. 9949.0500). See page 5.
- Adjustable cam-lock drag brake.



AV-1
Standard with caster mounting plates



AV-2
Shown with optional casters (cable and punched end plate not included)




AV Series includes one durable rubber twist tie for cable ends.
Part No. 9949.0082

PARTS DRAWING – AV-1-ISO 190, AV-2-ISO 191, AV-3-ISO 231

Model Number	Cable Capacity of Reel feet m									Approx. Weight without cable lb. kg			Reel Dimensions in. mm							
	O.D. (in) O.D. (mm)	.25 6	.32 8	.38 10	.41 10	.45 11	.49 12	.58 15	.67 17	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.	A	B	C	D	E	F	G	H
AV-1		600	350	225	200	150	125	-	-	14	58*	21	10.5	7	6	13.75	11.75	14.25	14.25	7
		183	107	69	61	46	38	-	-	6	26	10	267	178	152	349	298	362	362	178
AV-2		-	-	-	750	600	500	350	250	25	80*	30	13	9	8	20	18	16.25	20.5	10
		-	-	-	229	183	152	107	76	11	36	14	330	229	203	508	457	413	521	254

Notes:

1. Specifications subject to change.
 2. Be sure to check dimensions and weights prior to ordering.
 3. Casters will add 2-3/4" to "G" dimension on AV-1 and AV-3.
Casters will add 3-1/2" to "G" dimension on AV-2.
- *Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

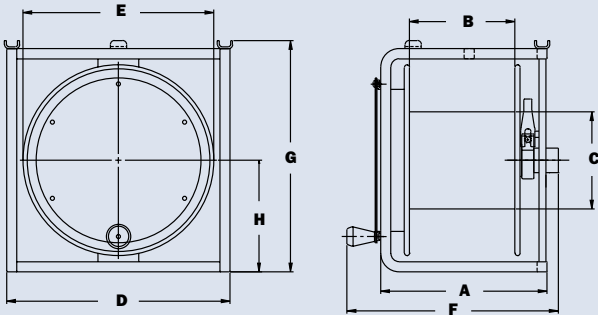

AV-1 and AV-2