

Series **CR**

• CR1600 • ECR1600 • CR6600 • ECR6600

PARTS DRAWING – SERIES CR1600 – ISO 76; SERIES CR6600 – ISO 45

Model Number For power rewind see Note 5	Cable Capacity of Reel feet m						Approx. Weight Crank Rewind lb. kg		Reel Dimensions*** in. mm												
		Ga./No. of Conductors							A	B	C	D	E CRANK	E POWER	F CRANK	F POWER	G	H	X	Y	
	12/3	10/3	8/3	12/4	10/4																
	O.D. in. mm	.60 15	.69 18	.75 19	.67 17	.75 19	NET	SHIP													
CR1614-17-18		175	100	–	100	100	30	68*	11	6	6	14.12	16.5	19	23	16.75	18.12	9.88	9.5	10	
		53	30	–	30	30	14	31	279	152	152	359	419	483	584	425	460	251	241	254	
CR1616-17-18		200	150	–	150	150	32	68*	13	8	6	14.12	16.5	19	25	18.75	18.12	9.88	11.5	10	
		61	46	–	46	46	15	31	330	203	152	359	419	483	635	476	460	251	292	254	
CR1618-17-18		275	200	–	200	200	33	80*	15	10	6	14.12	16.5	19	27	20.75	18.12	9.88	13.5	10	
		84	61	–	61	61	15	36	381	254	152	359	419	483	686	527	460	251	343	254	
CR1620-17-18		350	250	–	250	225	34	80*	17	12	6	14.12	16.5	19	29	22.75	18.12	9.88	15.5	10	
		107	76	–	76	69	15	36	432	305	152	359	419	483	737	578	460	251	394	254	
CR6614-19-20		150	100	–	125	100	113	148	11	5.5	10.5	20.5	22	22	16	16	21.5	12.12	5.75	16.75	
		46	30	–	38	30	51	67	279	140	267	521	559	559	406	406	546	308	146	425	
CR6614-23-24		300	225	175	250	200	120	155	11	5.5	10.5	20.5	23	23	16	16	23.5	12.12	5.75	16.75	
		91	69	53	76	61	54	70	279	140	267	521	584	584	406	406	597	308	146	425	
CR6614-25-26		350	250	200	300	225	133	168	11	5.5	10.5	25.5	24.75	24.75	16	16	27.88	15.5	5.75	21.75	
		107	76	61	91	69	60	76	279	140	267	648	629	629	406	406	708	394	146	552	

Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Dimensions reflect pressed frames.
- Weights shown in chart are for crank rewind models. Add these amounts for power rewind models:

Series CR1600	Net lbs/kg	Ship lbs/kg
Electric	18/8.2	18/8.2
Hydraulic	15/6.8	15/6.8
Air	15/6.8	15/6.8

Series CR6600	Net lbs/kg	Ship lbs/kg
Electric (1/3 HP)	18/8.2	18/8.2
Electric (1/2 HP)	40/18.1	40/18.1
Hydraulic	20/9.1	20/9.1
Air	20/9.1	20/9.1

- When ordering power rewind models, prefix model number with:

A = Air Rewind –
Supplied with control valve and
18" air hose.

E = Electric Rewind – (1/3 HP)
(Series CR1600 & CR6600)

EP = Electric Rewind – (1/2 HP)
(Series CR6600)
12v and 24v DC rewind reels are
supplied with switch and solenoid;
115v AC rewind reels are not
supplied with switch but can
be ordered separately.

HD = Hydraulic Rewind –
Not supplied with control valve.


- Add 2-1/8" to "A" dimension when using
external mounting brackets on CR1600,
ECR1600 Series reels.

- When ordering reels with a 4-conductor,
add 2" to "F" dimensions.


- Be sure to check dimensions and weights
prior to ordering.**

* Dimensional weight applies when shipped
as a parcel package (via FedEx or
UPS Ground).


***X, Y indicate mounting holes. See page 2.

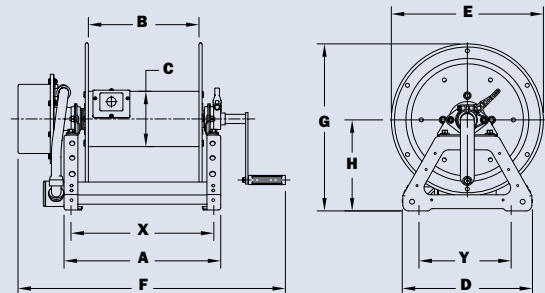

Series CR1600 (Manual Rewind)

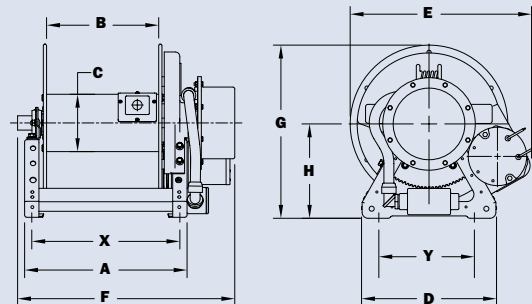

Series ECR1600 (Power Rewind)

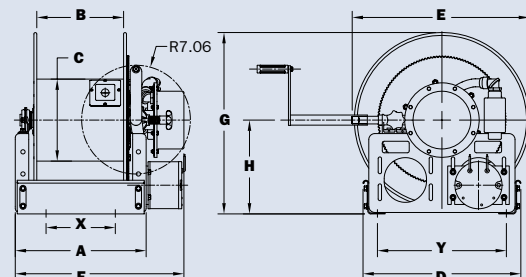

Series ECR6600 (Power Rewind)