

Series NSCR700/SCR700

PARTS DRAWING – SERIES NSCR700 – ISO 164; SERIES SCR700 – ISO 49

Model Number	Cable Capacity of Reel feet m					Approx. Weight lb. kg		Roller Assy.	Reel Dimensions*** in. mm									
		Ga./No. of Conductors				NET	SHIP		A	B	C	D	E	F	G	H	X	Y
		14/3	12/3	10/3	8/3													
	O.D. in. mm	.53 14	.60 15	.69 18	.75 19													
NSCR715-14-16-8C	35	25	-	-		59	74	N203	9	3	8	12	18.12	14.5	16.12	9.12	7	10
	11	8	-	-		27	34		229	76	203	305	460	368	409	232	178	254
NSCR715-16-17-10.5C	40	35	-	-		62	77	N203	9	3	10.5	12	19	14.5	17	9.12	7	10
	12	11	-	-		28	35		229	76	267	305	483	368	432	232	178	254
NSCR715-19-20-10.5J	50	50	50	50		74	109	N203	9	3	10.5	12	20.75	14.5	20	10.62	7	10
	15	15	15	15		34	49		229	76	267	305	527	368	508	270	178	254
NSCR716-23-24-15.5B	75	75	75	75		99	134	N204	10	4	15.5	12	24	15.5	24	12.62	8	10
	23	23	23	23		45	61		254	102	394	305	610	394	610	321	203	254
NSCR716-23-24-15.5G	100	100	-	-		105	140	N204	10	4	15.5	12	24	15.5	24	12.62	8	10
	30	30	-	-		48	64		254	102	394	305	610	394	610	321	203	254
SCR715-19-20-10.5J	50	50	50	50		74	109	R203	8.25	3	10.5	19.88	18.75	15.12	19.75	10.38	3.5	14.75
	15	15	15	15		34	49		210	76	267	505	476	384	502	264	89	375
SCR716-23-24-15.5B	75	75	75	75		99	134	R204	9.25	4	15.5	24.5	22.75	16.12	23.88	12.5	4.5	20
	23	23	23	23		45	61		235	102	394	622	578	409	607	318	114	508
SCR716-23-24-15.5G	100	100	-	-		105	140	R204	9.25	4	15.5	24.5	22.75	16.12	23.88	12.5	4.5	20
	30	30	-	-		48	64		235	102	394	622	578	409	607	318	114	508
SCR716-30-31-20A	120	120	120	120		127	162	R204	9.25	4	20	30.5	28.75	16.88	31.38	17	4.5	25.25
	37	37	37	37		58	73		235	102	508	775	730	429	797	432	114	641

Notes:

- Specifications subject to change.
- For reels with 4-conductor, 45-amp collector assemblies, add 2" to "F" dimension.
- Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
- Other sizes from standard components available upon request.
- Be sure to check dimensions and weights prior to ordering.**
- Roller assembly is supplied on standard models.

***X, Y indicate mounting holes. See page 2.

Available Roller Positions



SR (STD)




VR (OPT)





TR (OPT)



TR (Wallmount)

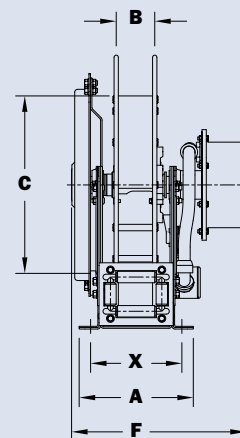

Series NSCR700

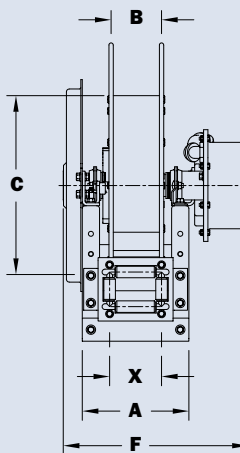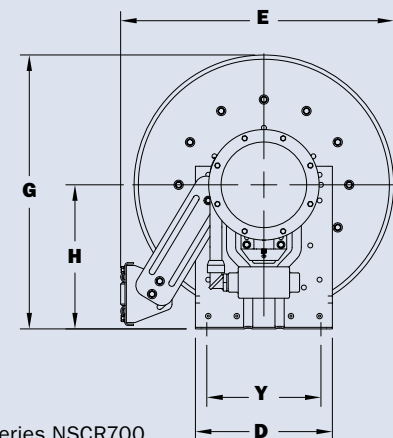

Series SCR700

