

Series VACN900/VAC900

• Shop Vacuum Applications • Car Detailing • Dust/Debris Collection Only

VACN900 Standard Features:

- To handle 1-1/2" ID industrial vacuum hose. NOTE: Standard inlet/outlet are slip fit connections, not threaded connections.
- N-series has a narrow frame and compact mounting base, allows for different mounting options: floor, ceiling or wall.
- Non-sparking ratchet assembly locks hose at different payout lengths and 4-way roller assembly to guide hose.

VAC900/VAC2900 Standard Features:

- VAC900: to handle 1-1/2" ID vacuum hose; VAC2900: to handle 2" ID vacuum hose. NOTE: Standard inlet/outlet are slip fit connections, not threaded connections.
- Roll-formed channel frame for heavy-duty applications, allows different mounting options: floor, ceiling or wall.
- Non-sparking ratchet assembly locks hose at different payout lengths and 4-way roller assembly to guide hose.

NOTE: These reels are NOT for solid or liquid suction. Please refer to our Pumper Cleaner catalog for vacuum reel options with solid or liquid applications.



◀ VACN900 Series


Standard SR configuration shown
(hose not included)




VAC900 Series ▶

Optional TR configuration shown
(hose not included)

Model Number	Hose Capacity of Reel feet m			Approx. Weight lb. kg		Standard Roller Assy.	Reel Dimensions*** in. mm								
	I.D. in. mm	1-1/2 38	2 51	NET	SHIP		A	B	D	E	F	G	H	X	Y
	O.D. in. mm	1.84 47	2.34 59												
VACN918-23-24-10.5L	25 8	— —	60 27	95 43	N306	12 305	6 152	12 305	24 610	13.25 337	24 610	12.63 320	10 254	10 254	
VACN920-23-24-10.5L	35 11	— —	62 28	97 44	N308	14 356	8 203	12 305	24 610	15.25 387	24 610	12.63 320	12 305	10 254	
VAC920-28-29-10.5J	50 15	— —	76 34	111 50	R308	13.25 337	8 203	28.5 724	26.75 679	16.5 419	28.25 718	14.88 378	8.5 216	23.25 591	
VAC2920-28-29-10.5J	— —	25 8	77 35	112 51	R2308	13.25 337	8 203	28.5 724	26.75 679	16.75 425	28.25 718	14.88 378	8.5 216	23.25 591	
VAC2922-28-29-10.5J	— —	35 11	79 36	113 51	R2310	15.25 387	10 254	28.5 724	26.75 679	18.75 476	28.25 718	14.88 378	10.5 267	23.25 591	
VAC2920-33-34-10.5J	— —	50 15	92 42	127 58	R2308	13.25 337	8 203	33 838	31.75 806	16.75 425	33.63 854	17.75 451	8.5 216	27.75 705	

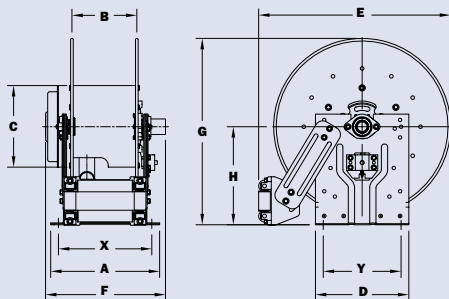

VACN900

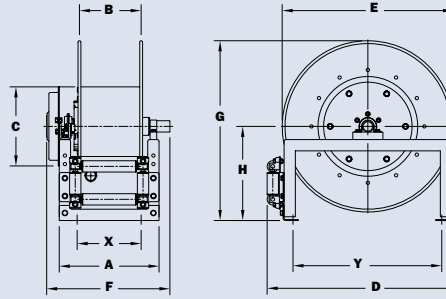

VAC900/VAC2900


Available Roller Positions



SR (STD)



VR (OPT)



TR (OPT)



TR (Wallmount)

Notes: A hose stop is necessary to keep spring from unwinding.

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
3. Be sure to check dimensions and weights prior to ordering.

*** X, Y indicate mounting holes.