


Series **PB/HDDPB****PARTS DRAWING: ALUM. CONST. PRESSED FRAME – ISO 202; ALUM. SQUARE TUBE FRAME – ISO 204;
STEEL CONST. PRESSED FRAME – ISO 18**

Model Number For Power Rewind see Note 4	Hose Capacity of Reel feet m			Approx. Weight Power Rewind lb. kg				Reel Dimensions*** in. mm										
	I.D. in. mm	1 25	1-1/2 38	Steel		Alum.		A	B	C	D	E	F POWER	F DIRECT DRIVE HYD	G	H	X	Y
	O.D. in. mm	1.5 38	2.16 55	NET	SHIP	NET	SHIP											
PB24-23-24	125 38	– –	142 64	184 83	119 54	160 72	21 533	15.5 394	10.5 267	20.5 521	22.75 578	29.25 743	35.12 892	23.5 597	12.12 308	13 330	16.75 425	
PB30-23-24	150 46	– –	155 70	197 89	124 56	165 75	27.5 699	22 559	10.5 267	20.5 521	22.75 578	35.75 908	41.62 1057	23.5 597	12.12 308	19.5 495	16.75 425	
PB26-25-26	150 46	– –	155 70	197 89	137 62	178 81	23 584	17.5 445	10.5 267	25.5 648	24.75 629	31 787	37 940	27.88 708	15.5 394	15 381	21.75 552	
PB28-25-26	200 61	– –	163 74	205 93	157 71	198 90	25.5 648	20 508	10.5 267	25.5 648	24.75 629	33.75 857	39.62 1006	27.88 708	15.5 394	17.5 445	21.75 552	
PB22-30-31	250 76	– –	158 71	208 94	130 59	175 79	19 483	13.5 343	10.5 267	25.5 648	28.75 730	27.25 692	33.12 841	29.88 759	15.5 394	11 279	21.75 552	
PB18-33-34	200 61	– –	157 71	207 94	146 66	194 89	14.5 368	9.5 241	10.5 267	31.5 800	31.75 806	23.75 603	29.12 740	33.62 854	17.75 451	7 178	27.75 705	
PB24-25-26-15.5	– –	50 15	160 64	202 91	133 60	174 79	21 533	15.5 394	15.5 394	25.5 648	24.75 629	29.25 743	– –	27.88 708	15.5 394	13 330	21.75 552	
PB28-25-26-15.5	– –	75 23	173 78	215 97	159 72	200 91	25.5 648	20 508	15.5 394	25.5 648	24.75 629	33.75 857	– –	27.88 708	15.5 394	17.5 445	21.75 552	
PB26-30-31-15.5	– –	100 30	173 78	215 97	140 63	185 84	23 584	17.5 445	15.5 394	25.5 648	28.75 730	31.25 794	– –	29.88 759	15.5 394	15 381	21.75 552	


Notes:

- Specifications subject to change.
 - Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
 - Dimensions shown for reels up to and including 30-31 disc size reflect pressed frames. Reel sizes ending in (33-34) are built with rollform/square tubing construction.
 - When ordering power rewind models, prefix model number with:
 - A** = Air Rewind–Supplied with control valve and 25" air hose.
 - E** = Explosion-Proof Electric Rewind (2/3 HP) – Supplied with explosion-proof switch, solenoid, and junction box.
 - HD** = Hydraulic Rewind–Not supplied with control valve.
 - HDD** = Direct Drive Hydraulic Rewind–Not supplied with control valve.
 (When ordering **A**, **HD** & **HDD** power rewind reels deduct 20 lbs. from ship weight).
 - Be sure to check dimensions and weights prior to ordering.**
- NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

***X, Y indicate mounting holes.

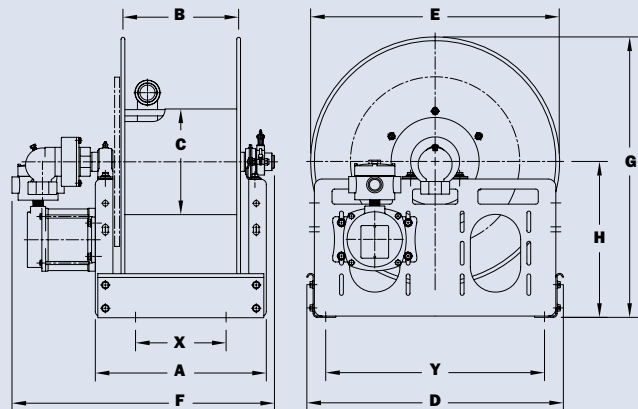

Series EPB

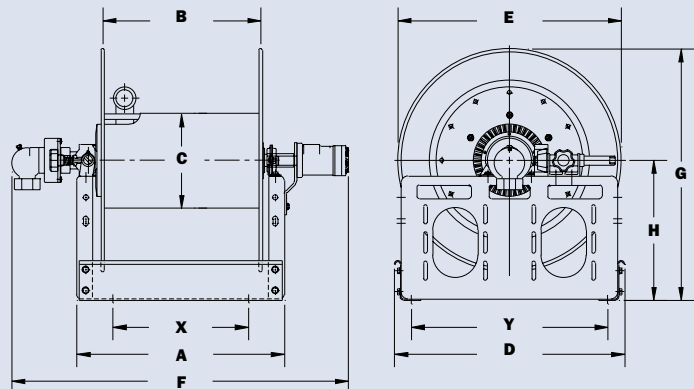

Series HDDPB