

Series PBGMB/PBGMT

PARTS DRAWING: BOTH SERIES PBGMB and SERIES PBGMT – ISO 202, 204 and ISO 195, 200

Model Number For Power Rewind see Note 3	Hose Capacity of Reel feet m		Approx. Weight Power Rewind lb. kg		Reel Dimensions*** in. mm													
	I.D. in. mm	1 25	NET	SHIP	A	B	D	E	F POWER	F DIRECT DRIVE HYD	G	H	J	K	L	M	X	Y
	O.D. in. mm	1.5 38																
PBGBM 24-23-24	125	160	185		21	15.5	20.5	22.75	29.25	35.12	23.5	12.12	49	36.75	30	–	13	16.75
	38	73	84		533	394	521	578	743	892	597	308	1245	933	762	–	330	425
PBGBM 30-23-24	150	170	200		27.5	22	20.5	22.75	35.75	41.62	23.5	12.12	49	36.75	36.75	–	19.5	16.75
	46	77	91		699	559	521	578	908	1057	597	308	1245	933	933	–	495	425
PBGBM 26-25-26	150	185	215		23	17.5	25.5	24.75	31.25	37.12	27.88	15.5	47.75	37.75	31	–	15	21.75
	46	84	98		584	445	648	629	794	943	708	394	1213	959	787	–	381	552
PBGBM 28-25-26	200	191	221		25.5	20	25.5	24.75	33.75	39.62	27.88	15.5	47.75	39	34.75	–	17.5	21.75
	61	87	100		648	508	648	629	857	1006	708	394	1213	991	883	–	445	552
PBGBM 22-30-31	250	188	238		19	13.5	25.5	28.75	27.25	33.12	29.88	15.5	52.25	35.75	29	–	11	21.75
	76	85	108		483	343	648	730	692	841	759	394	1327	908	737	–	279	552
PBGBM 18-33-34	200	175	225		14.5	9.5	31.5	31.75	23.75	29.12	33.62	17.75	56.75	33.5	26.75	–	7	27.75
	61	79	102		368	241	800	806	603	740	854	451	1441	851	679	–	178	705
PBGMT 24-23-24	125	168	193		21	15.5	20.5	22.75	29.25	35.12	29.5	12.12	33	36.75	30	31.5	13	16.75
	38	76	88		533	394	521	578	743	892	749	308	838	933	762	800	330	425
PBGMT 30-23-24	150	178	208		27.5	22	20.5	22.75	35.75	41.62	29.5	12.12	33	40.62	36.75	31.5	19.5	16.75
	46	81	94		699	559	521	578	908	1057	749	308	838	1032	933	800	495	425
PBGMT 26-25-26	150	193	223		23	17.5	25.5	24.75	31.25	37.12	32.88	15.5	33.25	37.75	31	37.25	15	21.75
	46	88	101		584	445	648	629	794	943	835	394	845	959	787	946	381	552
PBGMT 28-25-26	200	181	211		25.5	20	25.5	24.75	33.75	39.62	33	15.5	34	39	34.75	35	17.5	21.75
	61	82	96		648	508	648	629	857	1006	838	394	864	991	883	889	445	552
PBGMT 22-30-31	250	196	246		19	13.5	25.5	28.75	27.25	33.12	36.13	15.5	35.5	35.75	29	42.5	11	21.75
	76	88	112		483	343	648	730	692	841	918	394	902	908	737	1080	279	552
PBGMT 18-33-34	200	183	233		14.5	9.5	31.5	31.75	23.75	29.12	38.375	17.75	37	38.38	26.38	44.75	7	27.75
	61	83	106		368	241	800	806	603	740	975	451	940	975	670	1137	178	705

Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- When ordering power rewind models, prefix model number with:
 - E** = Explosion-Proof Electric Rewind (2/3 HP)–Supplied with explosion-proof switch, solenoid, and junction box.
 - HDD** = Direct Drive Hydraulic Rewind–Not supplied with control valve. When ordering **HDD** power rewind reels deduct 20 lbs. from ship weight).

Air or hydraulic chain driven rewind available, please consult factory.

- Dimension "J" is maximum, with Guidemaster® in operating position. Dimension "K" is maximum, with Guidemaster® in traveling position opposite rewind motor, as shown in dimensional drawing.

Dimension "L" is maximum, with Guidemaster® in traveling position on same side as rewind motor.


- Guidemaster® weight is approximately 21 lbs. Guidemaster® is shipped as parts.

- Be sure to check dimensions and weights prior to ordering.


- Consult factory for reels using 1-1/2" I.D. hose.

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

***X, Y indicate mounting holes.

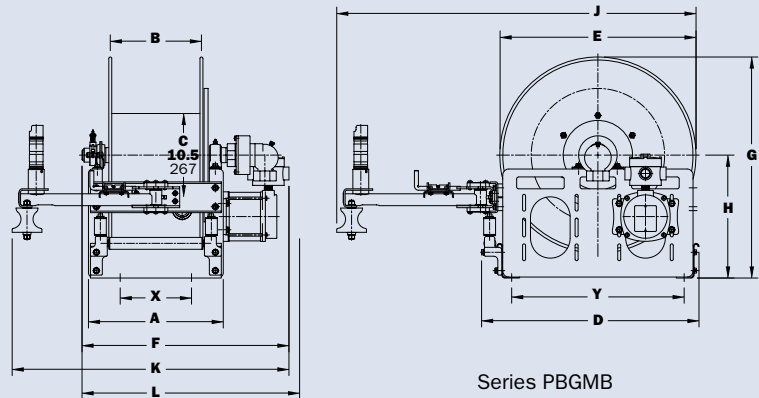

Series PBGMB

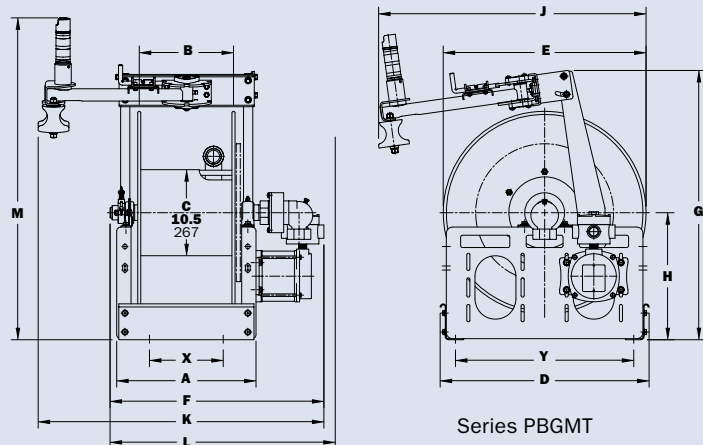

Series PBGMT