

Series 6100

- Jetting • Water Blasting
- Sewer Cleaning

To handle single 3/8" through 1/2" I.D. hose.

- Rugged construction.
- Strong spool to control hose expansion.
- Standard inlet: 90° ball bearing swivel joint, 1/2" female NPT threads.
- Standard outlet: 1/2" female NPT threads.
- #40 chain and sprocket drive.
- Hydraulic, Air and Electric motorized rewinds are available.
- Steel-Hub Assembly – rated to 5000 psi (345 bar).

Options

- 10,000 psi working pressure (690 bar).
- Auxiliary rewind.
- Roller assemblies.
- Chain guard.
- Hose packages.



Air Rewind (A) shown with optional rollers and optional auxiliary rewind

PARTS DRAWING – ISO 236

Model Number For power rewind see Note 3	Hose Capacity of Reel feet m			Approx. Weight lb. kg		Reel Dimensions*** In. mm									
	I.D. in. mm	3/8 10	1/2 13	NET	SHIP	A	B	C	D	E	F	G	H	X	Y
	O.D. in. mm	.68 17.3	.89 22.6												
6118-23-24		400	200	170	205	16	9.5	10.5	23.25	22.75	22.75	24	12.63	9	20.5
		122	61	77	93	406	241	267	591	578	578	610	321	229	514
6122-23-24		600	300	175	210	20	13.5	10.5	23.25	22.75	26.75	24	12.63	13	20.25
		183	91	79	95	508	343	267	591	578	679	610	321	330	514
6116-25-26		400	200	171	206	14	7.5	10.5	25.25	24.75	20.75	26	13.63	7	22.25
		122	61	78	93	356	191	267	641	629	527	660	346	178	565
6118-25-26		475	300	176	211	16	9.5	10.5	25.25	24.75	22.75	26	13.63	9	22.25
		145	91	80	96	406	241	267	641	629	578	660	346	229	565
6122-25-26		700	450	187	222	20	13.5	10.5	25.25	24.75	26.75	26	13.63	13	22.25
		213	137	85	101	508	343	267	641	629	679	660	346	330	565
6116-30-31		600	300	200	250	14	7.5	10.5	29.25	28.75	20.75	31	16.63	7	26.25
		183	91	91	113	356	191	267	743	730	527	787	422	178	667
6118-30-31		675	400	205	255	16	9.5	10.5	29.25	28.75	22.75	31	16.63	9	26.25
		206	122	93	116	406	241	267	743	730	578	787	422	229	667

Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- When ordering power rewind models, prefix model number with:
 - A** = Air Rewind
 - EP** = Electric Rewind (2/3 HP) with Switch and Solenoid
 - EPJ** = Electric Rewind with EP Switch, Solenoid and Junction Box
 - HD** = Hydraulic Rewind


(Air rewind reels are supplied with control valve and 18" air hose; 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately; hydraulic rewind reels are not supplied with control valve.)

4. **Finish:** Refer to page 27.

5. **Be sure to check dimensions and weights prior to ordering.**

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

*** X, Y indicate mounting holes which are 5/8" diameter.

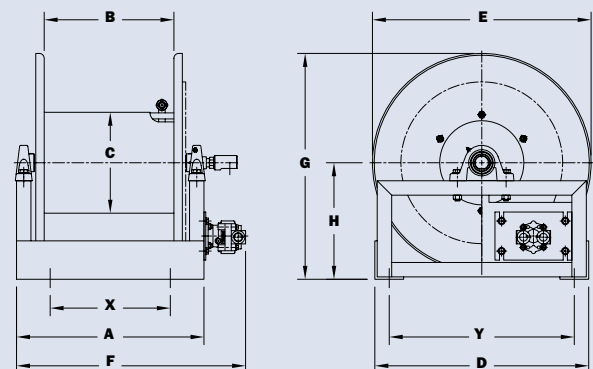

Power rewind shown