

Series **6200**

• Water Blasting • Sewer Cleaning

To handle single 3/4" through 1" I.D. hose.

- Heavy-duty construction.
- Strong spool and frame to control hose expansion.
- Standard inlet: 90° ball bearing swivel joint, 1" female NPT threads.
- Standard outlet: 1" female NPT threads.
- Hydraulic motor rewind.
- #50 chain and sprocket drive.
- Steel hub assembly – rated to 3000 psi (207 bar).
- Assembly "A" roller on front of frame.
- Full chain guard.

Options

- 5000 psi working pressure (345 bar).
- Direct drive (hydraulic) motor rewind (see page 8).
- Hose packages.
- Roller assemblies.



Standard configuration shown

PARTS DRAWING – ISO 237


Model Number For power rewind see Note 3	Hose Capacity of Reel feet m			Approx. Weight lb. kg		Reel Dimensions*** in. mm									
	I.D. in. mm	3/4 19	1 25	NET	SHIP	A	B	C	D	E	F	G	H	X	Y
	O.D. in. mm	1.18 29.9	1.43 36.3												
6218-33-34-16		225	150	367	418	19	9.5	16	32.25	34.25	24	34	18.13	12	29.25
		69	46	166	190	483	241	406	819	870	610	864	461	305	749
6222-33-34-16		300	200	392	446	23	13.5	16	32.25	34.25	28	34	18.13	16	29.25
		91	61	178	202	584	343	406	819	870	711	864	461	406	749
6224-33-34-16		375	225	405	455	25	15.5	16	32.25	34.25	30	34	18.13	18	29.25
		114	69	184	206	635	394	406	819	870	762	864	461	457	749
6218-39-40-16		350	250	454	524	19	9.5	16	39.5	41.5	25	40	20.5	12	36.5
		107	76	206	238	483	241	406	1003	1054	635	1016	521	305	927
6220-39-40-16		400	300	466	536	21	11.5	16	39.5	41.5	27	40	20.5	14	36.5
		122	91	211	243	533	292	406	1003	1054	686	1016	521	356	927
6222-39-40-16		500	350	480	555	23	13.5	16	39.5	41.5	29	40	20.5	16	36.5
		152	107	218	252	584	343	406	1003	1054	737	1016	521	406	927
6224-39-40-16		600	400	492	577	25	15.5	16	39.5	41.5	31	40	20.5	18	36.5
		183	122	223	263	635	394	406	1003	1054	787	1016	521	457	927
6220-45-46-16		–	400	543	628	21	11.5	16	45.5	47.5	27	46	23.5	14	42.5
		–	122	246	285	533	292	406	1156	1207	686	1168	597	356	1080
6224-45-46-16		900	500	570	655	25	15.5	16	45.5	47.5	31	46	23.5	18	42.5
		274	152	259	297	635	394	406	1156	1207	787	1168	597	457	1080

Notes:

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
3. When ordering power rewind models, prefix model number with **HD**=Hydraulic Rewind. Hydraulic rewind reels are not supplied with control valve.

4. **Finish:** Refer to page 27.5. **Be sure to check dimensions and weights prior to ordering.****NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

*** X, Y indicate mounting holes which are 5/8" diameter.

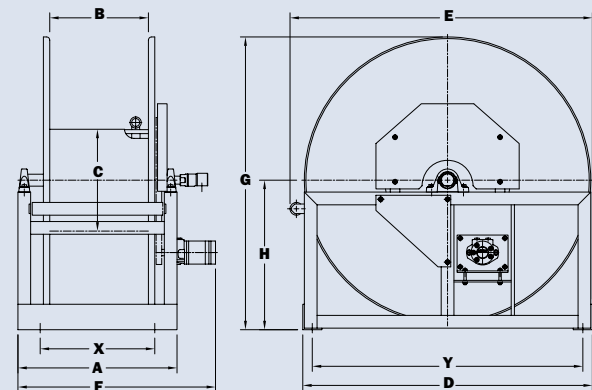

Power rewind shown